



Picture shown may not reflect actual package

C18 SOUND ATTENUATED ENCLOSURES

Griffin 50 Hz/60 Hz

These sound attenuated, factory installed enclosures incorporate internally mounted super critical level silencers, designed for safety and aesthetic value on fabricated steel skid bases. Optional UL listed tanks are available. These enclosures are of extremely rugged construction to withstand exposure to the elements of weather, and provides weather protection.

FEATURES

ROBUST/HIGHLY CORROSION RESISTANT CONSTRUCTION

- Approved for use with UL 2200 listed generator set packages
- Environmentally friendly, polyester powder baked paint
- 14 gauge steel
- Zinc plated or stainless steel fasteners
- Internally mounted super critical exhaust silencing system
- Factory installed

EXCELLENT ACCESS

- Large cable entry area for installation ease
- Accommodates optional rear-mounted breaker
- Double doors on both sides
- Vertically hinged doors allow 180° opening rotation
- Lube oil and coolant drains piped to exterior
- Radiator fill cover

SECURITY AND SAFETY

- Lockable access doors with standard key utilization
- Cooling fan and battery charging alternator fully guarded
- Fuel fill, oil fill, coolant and battery can only be reached via lockable access
- Stub-up cover sheets for "rodent proofing"
- Externally mounted emergency stop button
- Insulation has UL 94-HFI flame rating
- Designed for spreader-bar lifting to ensure safety
- Control panel viewing window

OPTIONS

- Yellow, white, beige or ASA 61 gray paint
- Interior lighting system
- Skid base with dragging and fork pockets
- UL listed integral fuel tank
- UL listed sub-base fuel tank
- Dual breakers (60 Hz only) (second breaker mounted right hand side)





ENCLOSURE OPERATING CHARACTERISTICS

60 Hz SA Enclosure 1 Breaker			Ambient Capability		Airflow Rate		Sound Pressure Levels dBA @ Full Load			Exhaust Back Pressure	
ekW	kVA	PP/SB	°C	°F	m³/s	cfm	1 m	7 m	15 m	in/H ₂ O	kPa
600	750	SB	50	122	9.8	20,765	85.7	76.6	70.6	12.45	3.10
545	681	PP	48	118	9.8	20,765	85.2	76.1	70.1	6.02	1.50
550	688	SB	54	129	9.8	20,765	85.2	76.1	70.1	6.22	1.55
500	625	PP	51	124	9.8	20,765	84.8	75.7	69.7	5.30	1.32

60 Hz SA Enclosure 2 Breaker			Ambient Capability		Airflow Rate		Sound Pressure Levels dBA @ Full Load			Exhaust Back Pressure	
ekW	kVA	PP/SB	°C	°F	m³/s	cfm	1 m	7 m	15 m	in/H ₂ O	kPa
600	750	SB	49	120	9.6	20,341	85.7	76.6	70.6	12.45	3.10
545	681	PP	48	118	9.6	20,341	85.2	76.1	70.1	6.02	1.50
550	688	SB	53	127	9.6	20,341	85.2	76.1	70.1	6.22	1.55
500	625	PP	52	126	9.6	20,341	84.8	75.7	69.7	5.30	1.32

50 Hz SA Enclosure			Ambient Capability		Airflow Rate		Sound Pressure Levels dBA @ Full Load			Exhaust Back Pressure	
ekW	kVA	PP/SB	°C	°F	m³/s	cfm	1 m	7 m	15 m	in/H ₂ O	kPa
560	700	SB	52	126	7.1	15,044	84.7	76.4	70.4	4.82	1.20
508	635	PP	52	126	7.1	15,044	84.5	76.5	70.5	3.68	0.92
520	650	SB	56	133	7.1	15,044	84.6	76.5	70.5	3.90	0.97
473	591	PP	55	131	7.1	15,044	84.4	76.5	70.5	3.08	0.77
480	600	SB	59	138	7.1	15,044	84.4	76.5	70.5	3.19	0.80
436	545	PP	58	136	7.1	15,044	84.3	76.5	70.5	2.56	0.64
440	550	SB	62	144	7.1	15,044	84.3	76.5	70.5	2.61	0.65
400	500	PP	61	142	7.1	15,044	84.1	76.4	70.4	2.14	0.53

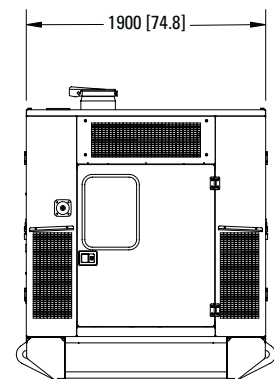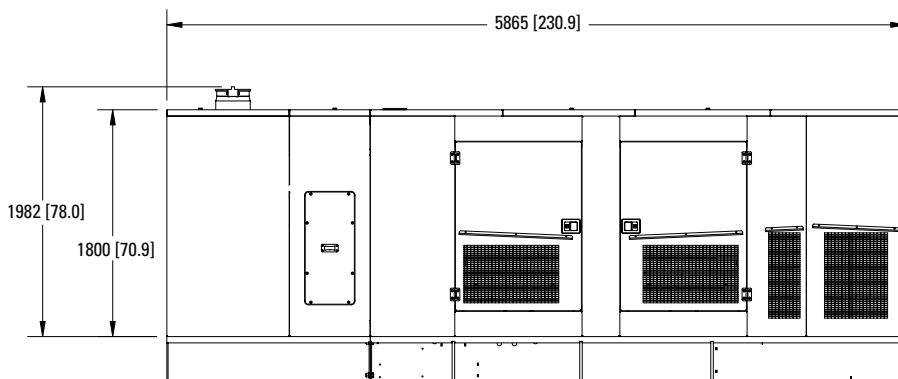

Approximate weight of enclosure: 1015 kg (2,238 lb)

Caterpillar is pleased to offer these additional generator set enclosure colors: white, bright beige, and ASA 61 gray. (Caterpillar yellow is standard color.)

Information contained in this publication may be considered confidential.

Discretion is recommended when distributing.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the POWER EDGE trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

www.cat-electricpower.com